



# C-Band Interference Elimination Filter

## Model 13961W

Ideal for eliminating interference from WiMAX, RADAR and virtually any other potential source of out-of-band interference.

The model 13961W combines innovative design techniques with the solid performance of its renowned predecessor (model 13961).



Utilizing a durable and true one piece body/flange construction, the 13961W is shipped with hardware & gasketing and is ready to install between the feedhorn and the LNB/LNA.

No other manufacturer's C-band interference elimination filter offers all of these features:


Length:	5.49" (13.9 cm)
Weight:	1.125 lb. (0.51 kg)
Passband VSWR:	1.44:1 Typ; 1.5:1 Max.
Group Delay Variation:	7 nS Max.
Rejection :	45 dB Min @ 3.65 GHz / 4.25 GHz 60 dB Typ @ 3.55 GHz / 4.35 GHz 70 dB Typ @ 3.50 GHz / 4.40 GHz

### Other Specifications:

Passband:	3.7 - 4.2 GHz
Passband Loss:	0.5 dB Approx. @ center band 0.5 dB Approx. roll off @ band edges
Transmit Band Rejection:	> 70 dB Typ from 5.8-6.725 GHz
Flanges:	CPR229G (Input) CPR229F (Output)

**International bands are also available.**

Marker	
1	3.500000 GHz -80.580 dB
2	3.550000 GHz -59.765 dB
3	3.650000 GHz -45.593 dB
4	3.700000 GHz -0.7973 dB
5	3.950000 GHz -0.4502 dB
6	4.200000 GHz -0.8706 dB
7	4.250000 GHz -45.423 dB
8	4.350000 GHz -57.927 dB
9	4.400000 GHz -70.079 dB

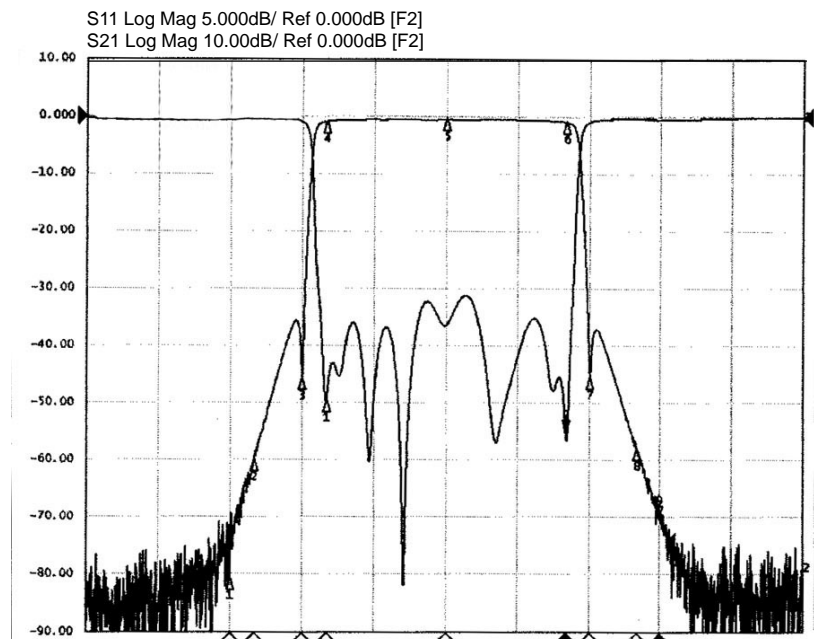

**MICROWAVE FILTER CO., INC.**  
6743 KINNE STREET, E. SYRACUSE, NY 13057  
E-Mail: [mfcsales@microwavefilter.com](mailto:mfcsales@microwavefilter.com)

800-448-1666 • 315-438-4700  
Web: [www.microwavefilter.com](http://www.microwavefilter.com)